SPECIFICATIONS

General
Type: Fully automatic 35mm lens/shutter AF camera with built-in flash and zoom lens. Quartz date functions available only on Caption/Date model.
Format: 24 x 36mm
Lens: See page 11 for details.
Viewfinder: Real-image zoom viewfinder covers approx. 84% (WIDE) and 84% (TELE) of actual picture area. 0.38x (130u), 0.37x (115u, 105u, 90u, 80u), magnification in WIDE; 1.3x (130u), 1.11x (115u), 1.01x (105u), 1.00x (90u), 0.88x (80u) magnification in TELE.
Viewfinder Information: Picture Frame, Close-up Frame, Wide AF Frame. Green LED Light ON: AF in focus; Blinking at 4 Hz: Subject too close; Blinking at 16 Hz: Camera shake warning.
Shutter: Electromagnetically controlled programmed shutter/aperture.

Autofocus
AF Modes: Passive 3-point AiAF; 3-point automatic, Center-point AF. Focusing Range: 0.6m / 2ft. to infinity, Close-up: 0.45m / 1.5ft. to infinity. (except 130u)

Exposure Control
AE Control: Program AE. AE locks at AF completion.

Film Handling
Film Speed Setting: ISO 25-3200 automatically set in full-stop increments by DX code. Film Loading/Advance/Rewind: Fully automatic; Mid-Roll Rewind possible.

Flash
Autoflash: Electronically controlled autoflash based on ISO and AF distance data.
Red-Eye Reduction: Activated via Flash Button.
Flash Recycling Time: Approximately 6 (130u/90u/80u) / 7 (115u/105u) seconds with new battery.
Flash Coupling Range (with ISO 400 color negative film, W: WIDE, T: TELE): 130u: W 2-20.4ft. / 0.6-6.2m; T 2-13.2ft. / 0.6-4m; 115u: W 2-26.9ft. / 0.6-8.2m; T 2-12.5ft. / 0.6-3.8m. 105u: W 2-26.9ft. / 0.6-8.2m; T 2-13.5ft. / 0.6-4.1m; 90u: W 2-25ft. / 0.6-7.6m; T 2-13.2ft. / 0.6-4m; 80u: W 2-25ft. / 0.6-7.6m; T 2-14.4ft. / 0.6-4.4m.

Other
Self-timer: Electronically controlled with 10-second delay.
Remote Control (130u Caption only): (Optional, requires Remote Controller RC-5) Infrared, 2-second delay shutter release up to 16.4ft. directly in front of camera and up to 11.5ft. at periphery.
Date Imprint: Built-in automatic date imprinting system programmed for 2003 to 2049. (Caption/Date model only)

Power Source
Battery: One 3V lithium battery (CR2)

Dimensions
See page 11 for details.

All data are based on Canon's Standard Test Method. Subject to change without notice.

Canon KNOW HOW™

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042 U.S.A.

Canon Canada Inc.
6390 Dixie Road, Mississauga,
Ontario L5T 1P7 Canada

Canon Mexicana, S. DE R.L. DE C.V.
Periférico Sur No. 4124, 5º y 6º pisos
Col. Ex-Rancho de Anzaldo
01900 México, D.F.

0036W460

©2003 CANON U.S.A., INC.
PRINTED IN U.S.A.

www.sureshotelph.com

Canon

SURE SHOT *U Series*

Be Sure.

Life inspires you. Your pictures express it.

It Just Feels Right.

Sculpted and compact, the Canon Sure Shot u series 35mm cameras feel like they were designed just for you. Available in a range of zoom models, there's the Sure Shot 130u with a breathtaking 3.4x Zoom, the 115u with its mighty 3x Zoom, the 105u with a 2.8x Zoom, the 90u with its 2.3x Zoom and the 80u with a 2.1x Zoom. Choose what fits your life.

Crystal Clear.

It's so easy to keep everything in focus. The passive 3-point Smart AiAF automatically scans three individual points in your picture for flawless accuracy — even when your subject isn't centered.

Your Own Point of View.

As you zoom, the Real-Image Zoom Viewfinder automatically adjusts to give you a bright, clear view that makes framing your shot easy. A built-in -2.5 to + 0.5 Dioptric Eyepiece Adjustment (Sure Shot 130u only) lets you set the camera to your eyesight, so shooting is even more comfortable.

Dioptric Adjustment Knob (130u only)

Zoom Button (105u shown)

Totally Simple.

Everything about the u series cameras was designed to make picture taking stress-free. The placement of the cameras' operation button is so intuitive and natural that you'll feel at ease shooting with just one hand. The cameras' LCDs are big, bright and easy to read, so a quick glance lets you know exactly what's going on.

LCD Panel (105u shown)

Take your imagination where it's never gone before.

Zoom Closest.

Inside its contoured, ultra-compact aluminum body, the 130u and 130u Caption have a 38-130mm (f/5.6-12.5) 3.4x Zoom Lens, Dioptric Adjustment Eyepiece and 7-Mode Light Guide Zoom Flash. Who could ask for more?

3.4x Zoom (38-130mm) Camera

SURE SHOT *130u*

SURE SHOT *130u* Caption

Move Close.

A remarkable value, these Sure Shots with their compact metallic body design, 6-Mode Light Guide Zoom Flash and impressive performance will really get you started. The 90u Date is equipped with 38-90mm (f/4.7-10.5) 2.3x Zoom Lens. The 80u Date has a 38-80mm (f/4.7-9.4) 2.1x Zoom Lens. Take your pick.

2.8x Zoom (38-105mm) Camera

SURE SHOT *105u* DATE

3x Zoom (38-115mm) Camera

SURE SHOT *115u* DATE

2.3x Zoom (38-90mm) Camera

SURE SHOT *90u* DATE

2.1x Zoom (38-80mm) Camera

SURE SHOT *80u* DATE

A Bigger Zoom.

With ultra-compact aluminum bodies sleekly encircled by a tinted metallic band, these Sure Shot models stand out. Both are equipped with 6-Mode Light Guide Zoom Flash. The 115u Date comes with a 38-115mm (f/5.6-13) 3x Zoom Lens. The 105u Date features a 38-105mm (f/5.6-11.9) 2.8x Zoom Lens. Great choices for great pictures.

Control Your Image.

Now you've got the power to take precise, perfect pictures everywhere. Six Programmed Image Control (PIC) Modes* (AUTO, Action, Night Portrait, Portrait, Close-up, Real-Time Release) handle the technicalities. So you can relax and shoot — no matter where you are or what's going on.

* not available on 130u

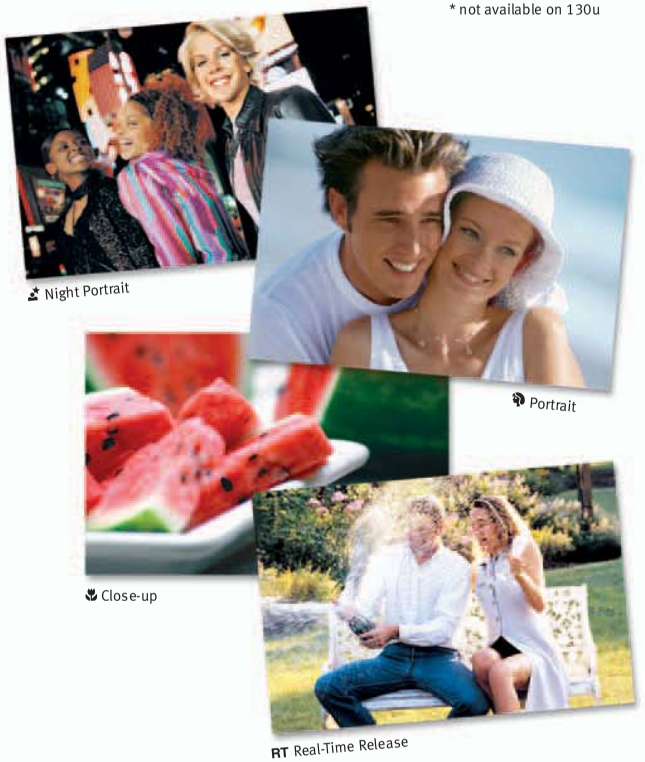

Night Portrait

Portrait

Close-up

RT Real-Time Release

Personal Style.

You've got your own way of doing things. So the Sure Shot u series cameras have five built-in Custom Functions that let you set up and save your personal settings. Now you can always shoot just the way you like.

1	REAL-TIME (RT) RELEASE
2	FLASH MODE MEMORY
3	AUTOMATIC FILM REWINDING
4	CENTER-POINT FOCUSING
5	CONTINUOUS SHOOTING

Stay focused — 3 Point Smart AutoFocus

To keep your pictures super-sharp as you zoom, the u series cameras automatically switch between multiple focusing points — the 130u uses seven, the other models use five — in separate stages (three for the 130u, two for all others) according to your zoom position. Feeling creative? Select Center Point AF to concentrate focus on a special subject and create something unique.

Sensitive, smart Exposure Control

Indoors or out — in spotlight, shadow or backlight — these cameras instantly create the perfect exposure for your pictures. You never have to think about it. A Central Area Sensor produces brilliant, accurately exposed images roll after roll. For greater precision, there's the Sure Shot 130u with a 16-Zone Metering Sensor that offers more control in subtle lighting situations.

When your creative impulse strikes, the u series cameras offer Manual Exposure Compensation. Use it to "take over" the camera's automatic settings to create an image of your own imagining. To produce darker, romantic exposures, set the –1.5 EV setting. To brighten your shot, select + 1.5 EV.

-1.5 EV

±0 EV

+1.5 EV

Low light or backlight, the built-in automatic 7-mode* Light Guide Zoom Flash provides stellar results, and the Red-Eye Reduction feature keeps eyes looking bright and natural. (*6-mode on 115u, 105u, 90u and 80u)

Date it! Caption it!

With the Sure Shot u series Date Model, you can imprint each picture with the Month, Day and Year (in your choice of formats) or the Day and Time. If you prefer a Caption Model, there's the Sure Shot 130u caption model. It lets you personalize your images with a choice of five phrases: I LOVE YOU, THANK YOU! SEASON'S GREETING, HAPPY BIRTHDAY and CONGRATULATIONS — in any of five languages: English, Spanish, French, German and Japanese. Or imprint the date and time. It's your call.

The 130u caption model is also compatible with the optional Remote Controller RC-5. This remote controller lets you operate the camera from up to 16.4 feet away for a more relaxed shooting experience.

(Imprinting simulated)

NOMENCLATURE

† For all cameras except 130u. For 130u please see below.

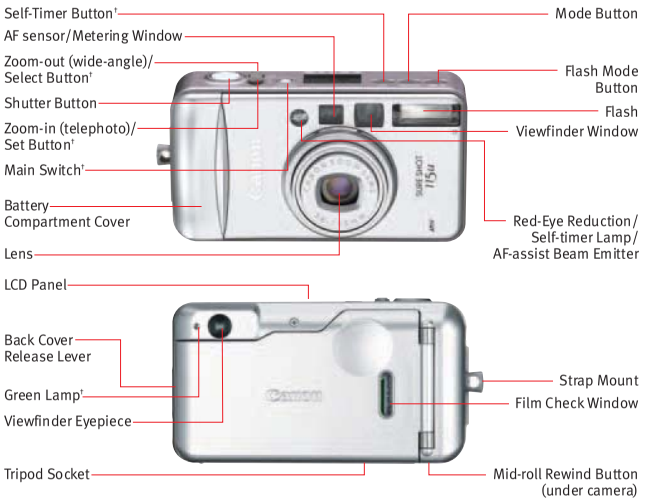

NOMENCLATURE (130u)

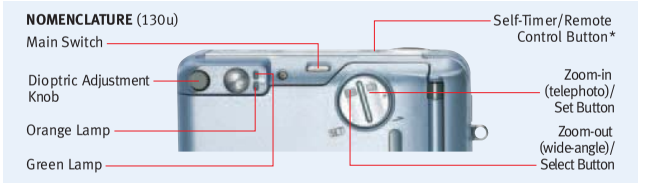

LCD PANEL (115u 105u 90u 80u)



LCD PANEL (130u)



A. Date/Custom Function Number
B. Autoflash
C. Flash OFF/Flash ON
D. Self-timer
E. Battery Check Mark
F. Action
G. Slow-Sync
H. Portrait
I. Close-up
J. Real-time Release
K. Shooting mode selection Mark
L. Red-Eye Reduction
M. Film Mark
N. Frame Counter
O. Manual Exposure Compensation
P. Caption Imprinting *
Q. Date Imprinting **
R. Remote Control *

* Caption and remote control options available only on 130u Caption model. Remote control requires optional accessory wireless Remote Controller RC-5, sold separately.
** Quartz date only on Date model.

COMPARISON CHART

Model	Zoom Range	Dimensions (W x H x D)	Weight
130u	**3.4x Zoom** / 38-130mm f/5.6-12.5	4.1" x 2.3" x 1.8" 105mm x 58.5mm x 45.8mm	7.4 oz. / 210g
115u	**3x Zoom** / 38-115mm f/5.6-13	4.2" x 2.3" x 1.7" 107.2mm x 58.7mm x 42.4mm	6.9 oz. / 195g
105u	**2.8x Zoom** / 38-105mm f/5.6-11.9	4.2" x 2.3" x 1.7" 107.2mm x 58.7mm x 42.4mm	6.9 oz. / 195g
90u	**2.4x Zoom** / 38-90mm f/4.7-10.5	4.2" x 2.3" x 1.7" 107.2mm x 58.7mm x 42.8mm	6.5 oz. / 185g
80u	**2.1x Zoom** / 38-80mm f/4.7-9.4	4.2" x 2.3" x 1.7" 107.2mm x 58.7mm x 42.8mm	6.5 oz. / 185g